



**ORACLE®**

## **DC and AC Bias Dependence of Capacitors**

Istvan Novak, Kendrick Barry Williams, Jason R. Miller, Gustavo Blando,  
Nathaniel Shannon

DesignCon East 2011 DCE200, September 27, 2011

# Outline

Introduction and background

Scope of work

Instrumentation setup

Measurement results

- Unit-to-unit variations

- Comparing X5R and X7R parts

- ESR and ESL variations

- Beware of details

- AC bias dependence

- Dependence of timing and sweep type

- Temperature dependence


How all this may impact our design

- Paralleled capacitors

- LC filters

Conclusions


# Introduction and Background

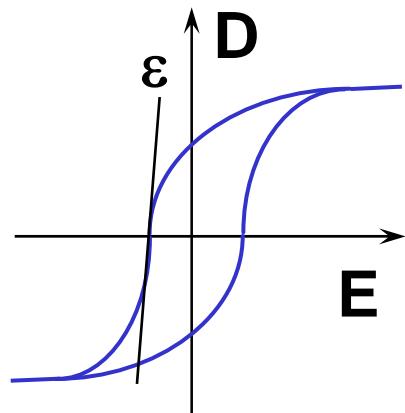

Class II and higher ceramic materials are ferroelectric

Ferroelectric materials have saturated hysteretic D-E curves

Layer count  
 $N = H/th$

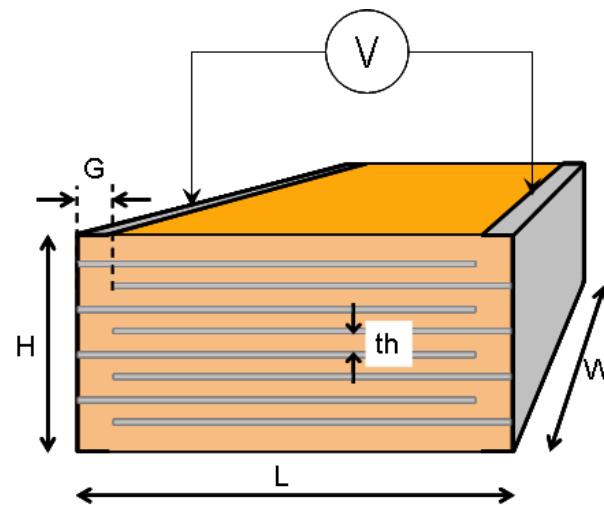


$$D = \epsilon E$$

$$C = \epsilon_0 \epsilon_r N \frac{W(L - 2G)}{th}$$

$$E = \frac{V}{th}$$

# Introduction and Background

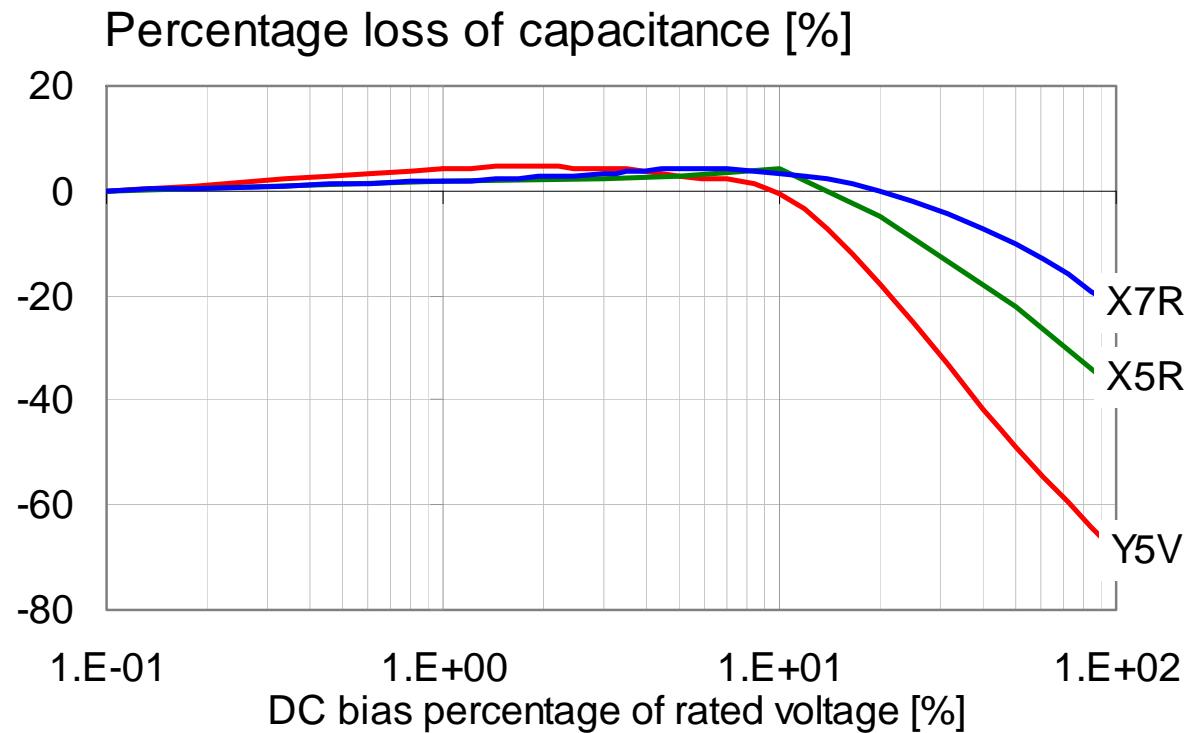

For some time, it was a common assumption that X7R MLCCs had less DC bias sensitivity than X5R parts.

*But lately...*

# Scope of Work

Class II X5R and X7R parts

0402, 0603, 0805, 1206 and 1210 body sizes

4-16VDC nominal voltage rating

Six different MLCC vendors


25 different part numbers

Multiple pieces of each part number

Most tests at room temperature, some in  
temperature chamber

# Instrumentation Setup

E5061B-3L5 network analyzer

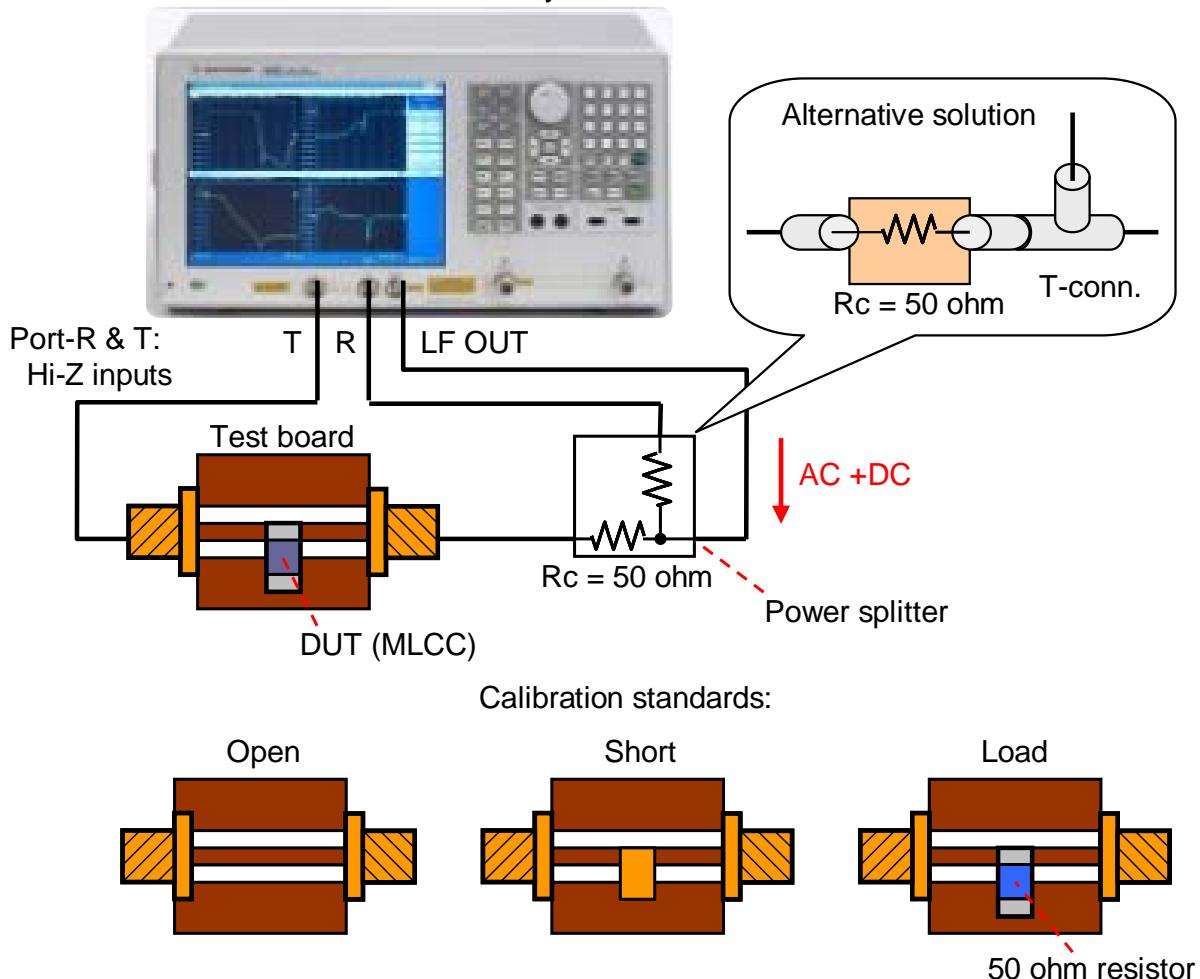

Constant AC across DUT

Calibration before each measurement

Impedance sweep 100Hz-10MHz range

Script steps DC bias in 1% increments and repeats sweep

User-defined dwell time



One sweep takes 100 seconds

Full sweep of DC bias takes 6-10 hours

For details, see: Novak-Mori-Resso, "Accuracy Improvements of PDN Impedance Measurements in the Low to Middle Frequency Range," Proceedings of DesignCon 2010, Santa Clara, CA, February 1-4, 2010

# Unit-to-Unit Variations

1uF 0603 16V  
X5R

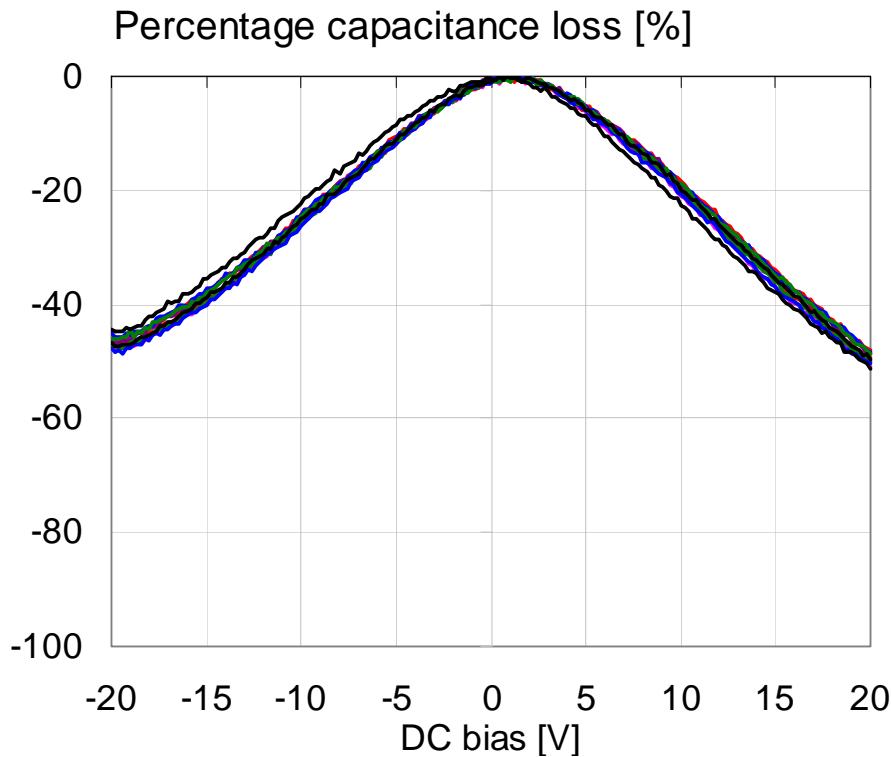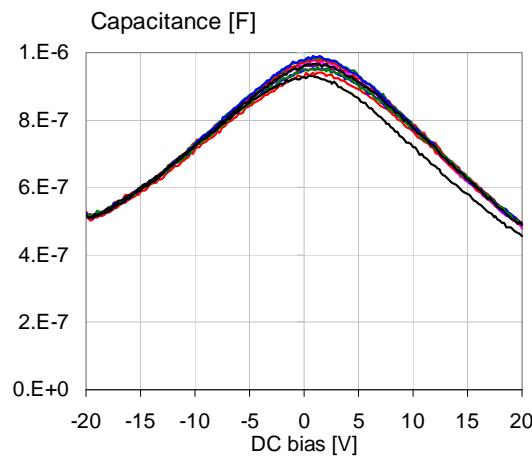

Ten samples from same vendor  
Capacitance measured at 100 Hz



# X5R vs X7R

Vendor allocation for measuring X5R and X7R 1uF 0603 16V MLCC parts

	X5R	X7R
Vendor-A	✓	✗
Vendor-B	✓	✓
Vendor-C	✓	✗
Vendor-D	✗	✓
Vendor-F (1)	✓	✓
Vendor-F (2)	✓	✗

# X5R vs X7R at 10mV AC


1uF 0603 16V X5R and  
X7R

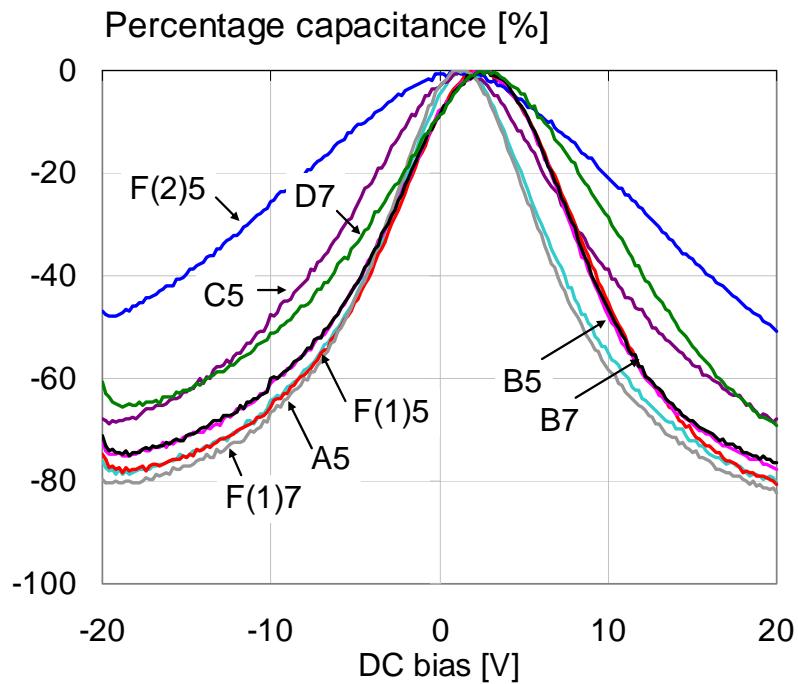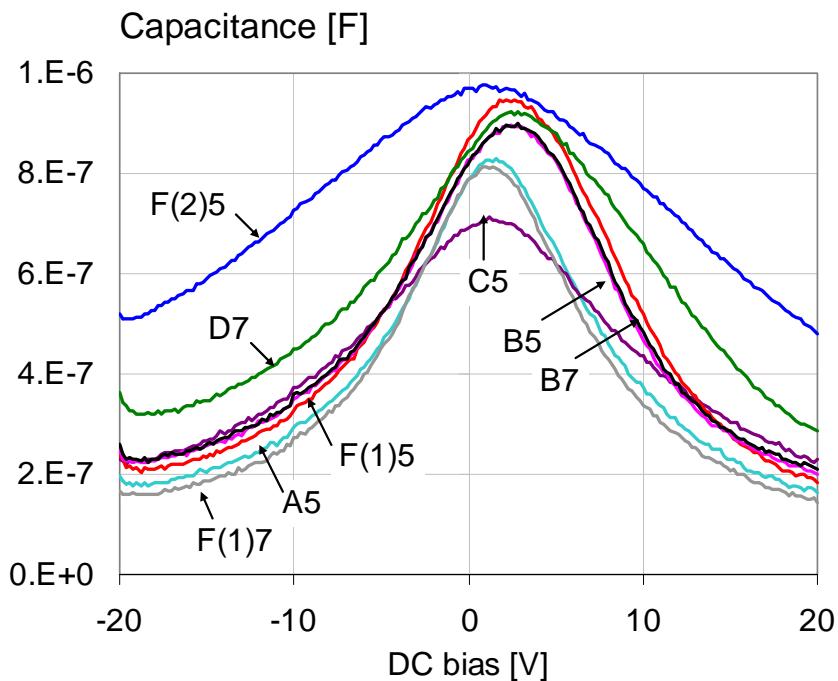


Samples from Vendors  
A,B,C,D,F

# X5R vs X7R at 10mV AC

1uF 0603 16V X5R  
parts only


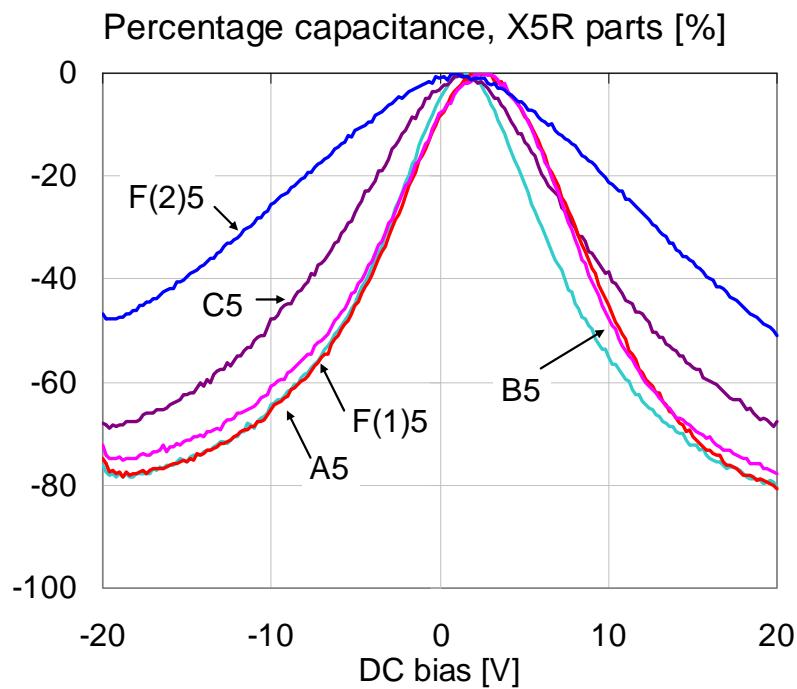


1uF 0603 16V X7R  
parts only

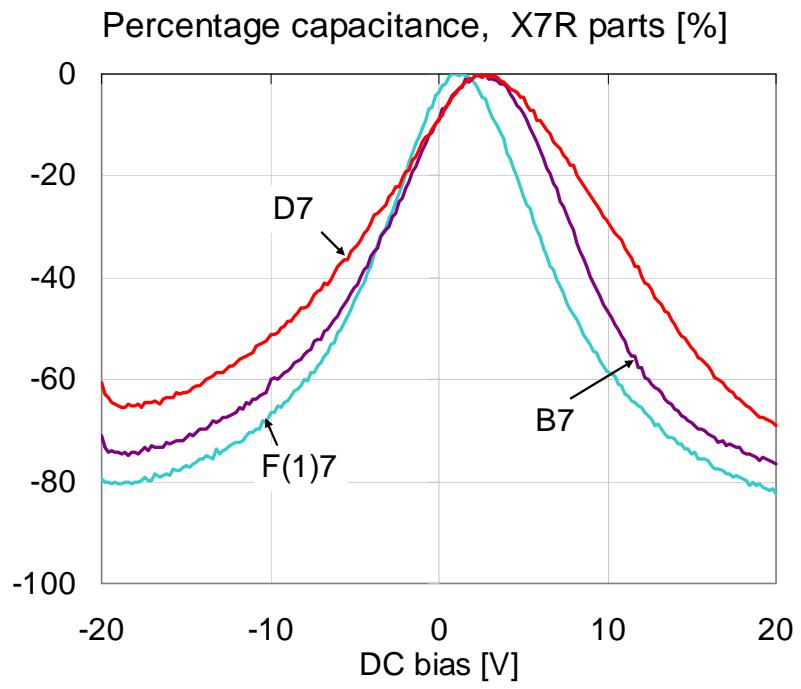



# X5R vs X7R at 10mV AC

X5R vs X7R from the same vendor

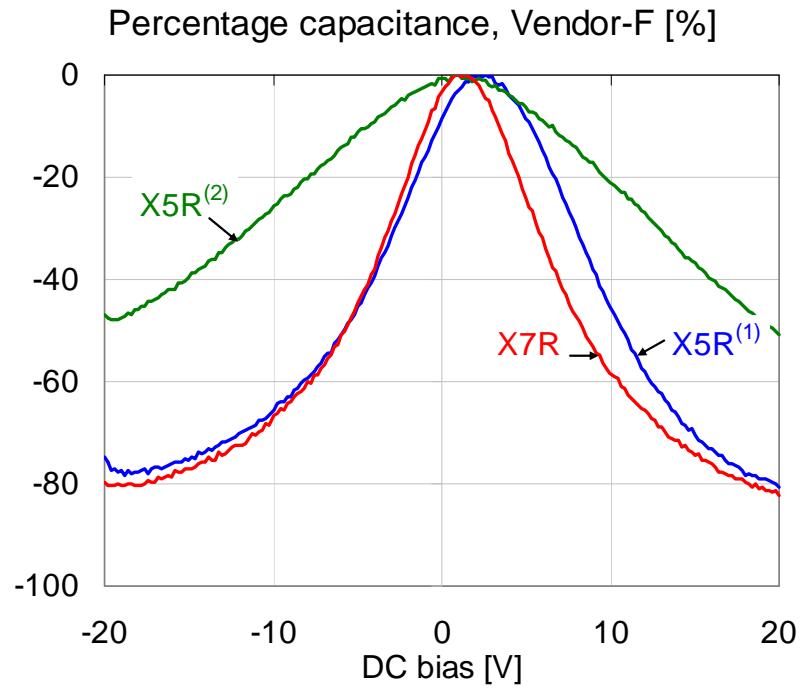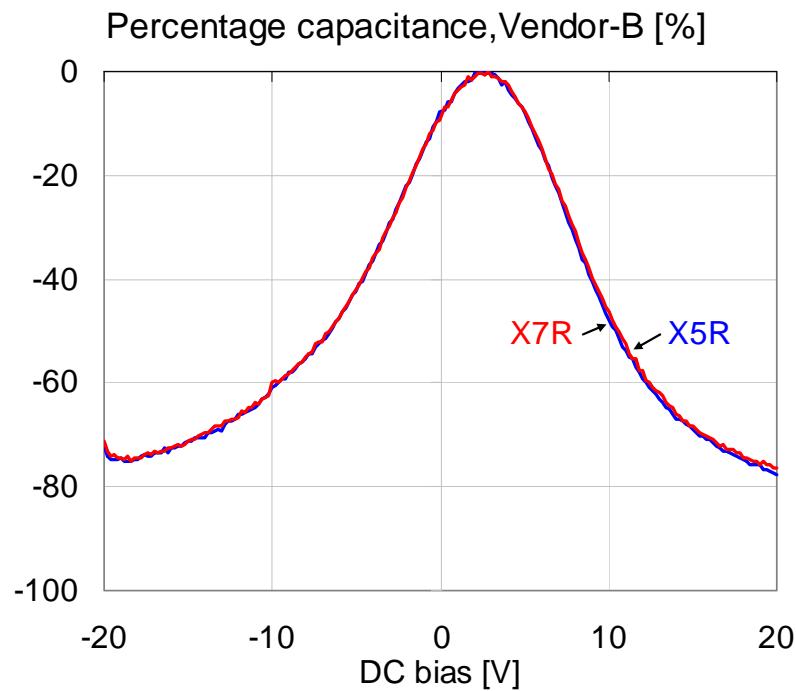

# X5R vs X7R at 500mV AC


1uF 0603 16V X5R and  
X7R

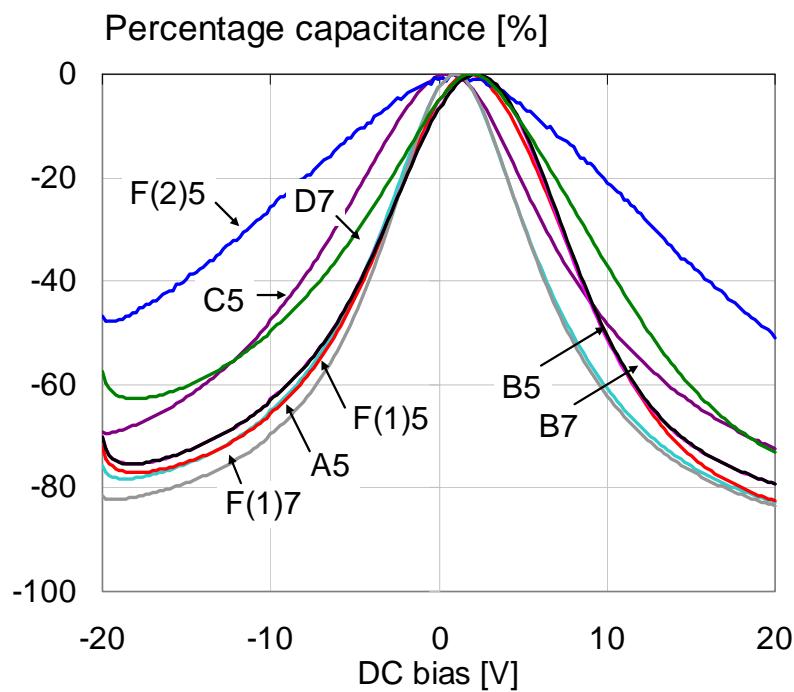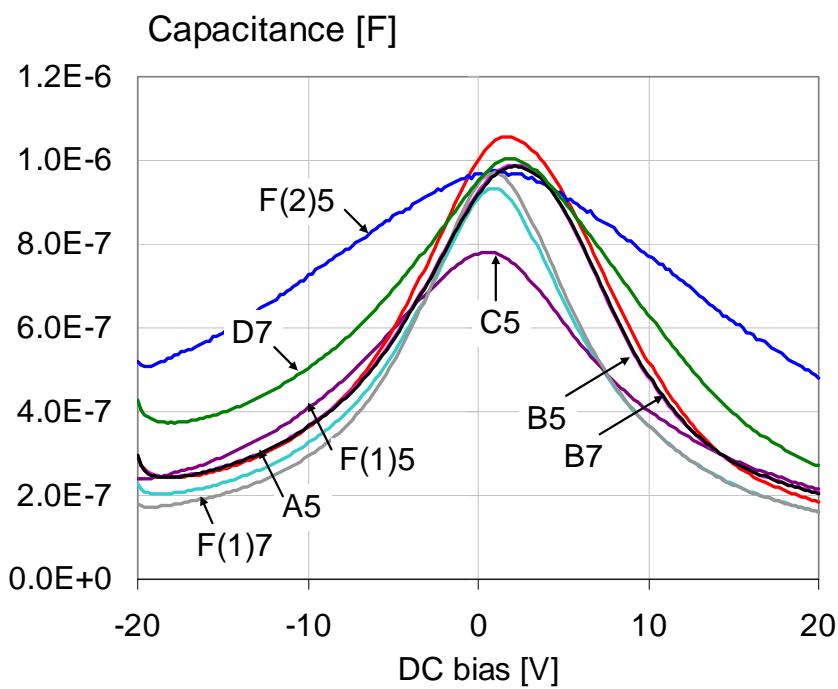


Samples from Vendors  
A,B,C,D,F

# X5R vs X7R at 500mV AC

1uF 0603 16V X5R  
parts only


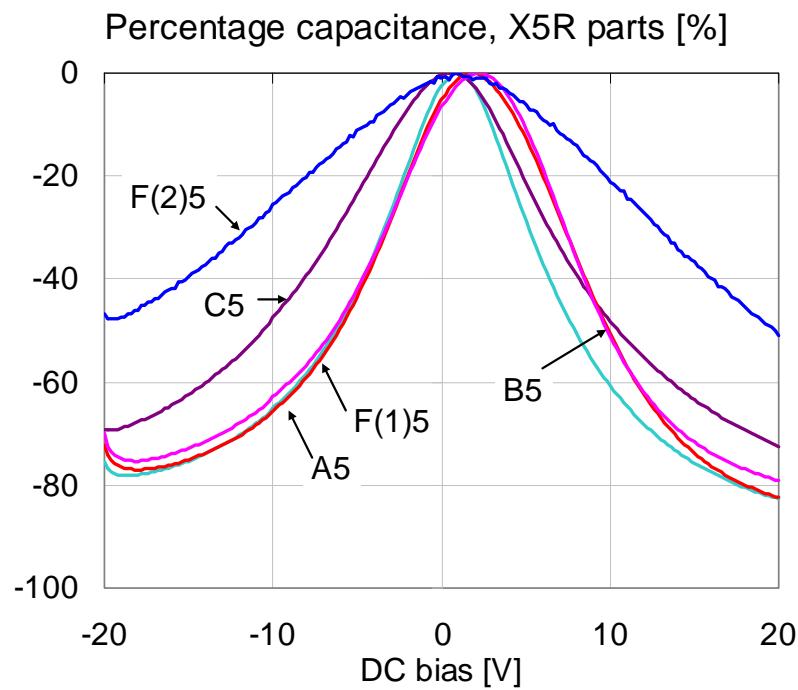


1uF 0603 16V X7R  
parts only




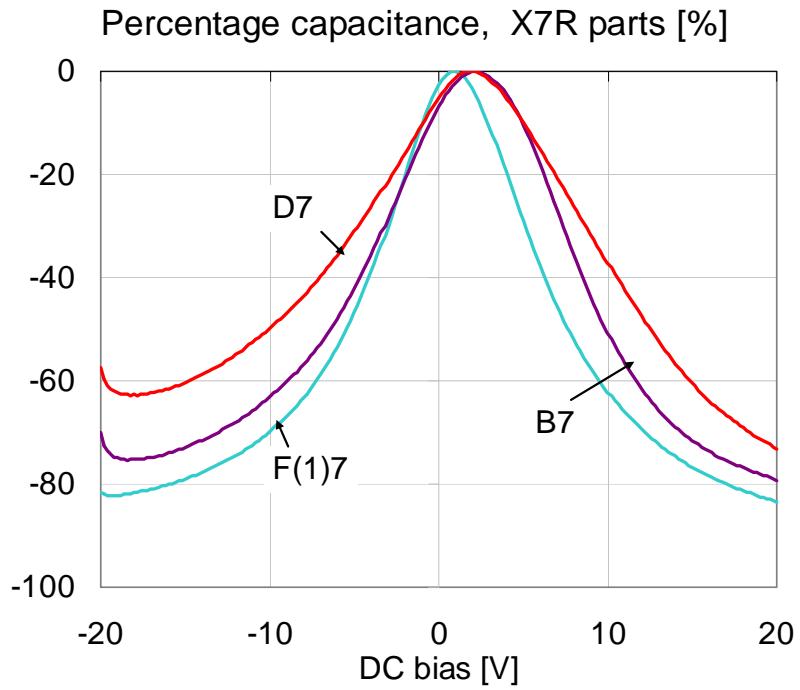


# X5R vs X7R at 500mV AC




X5R vs X7R from the same vendor

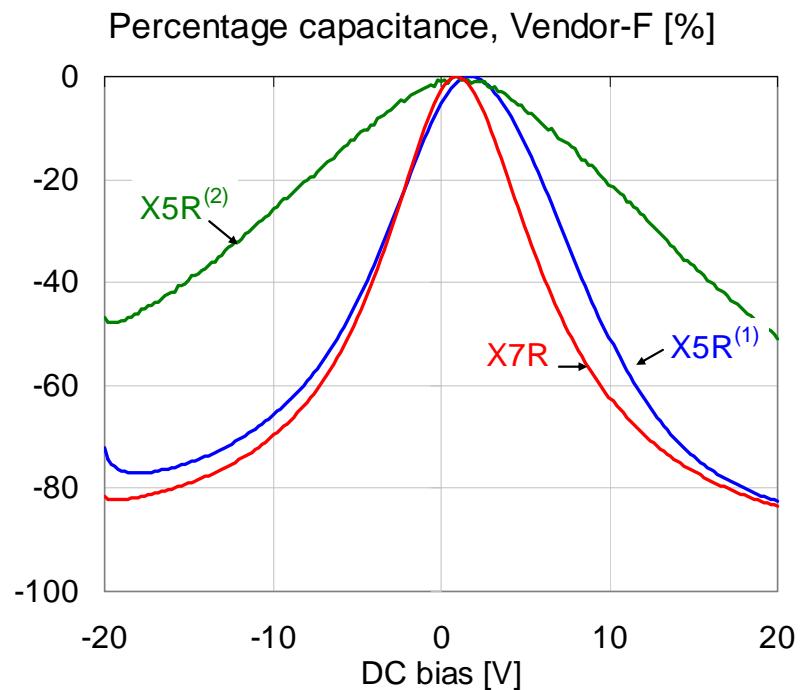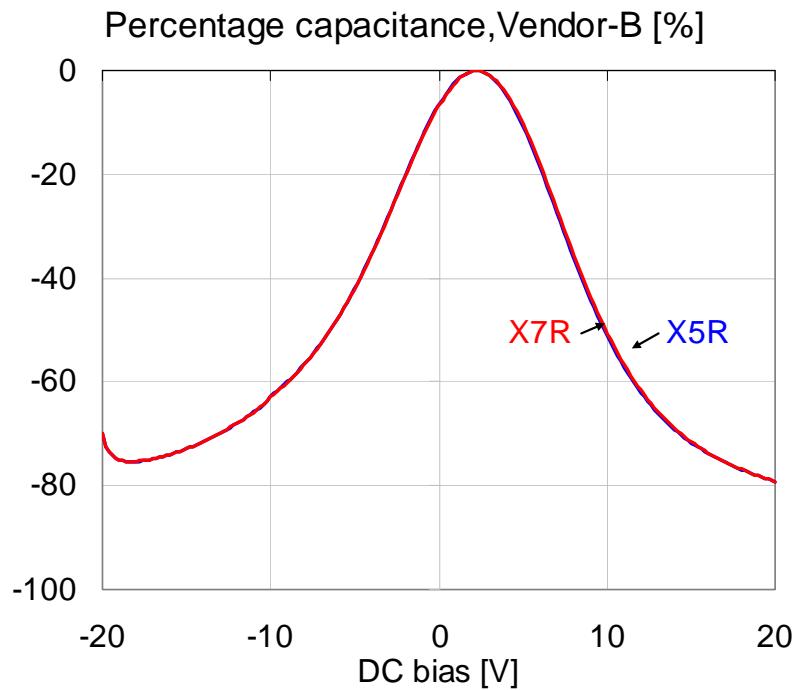

# X5R Correlation at 500mV AC

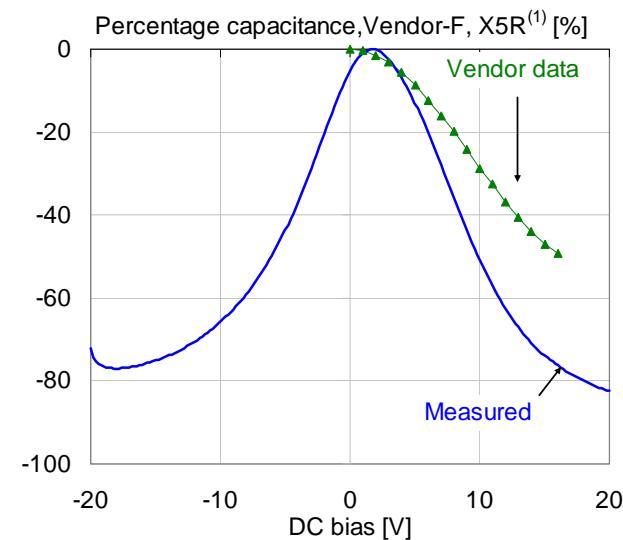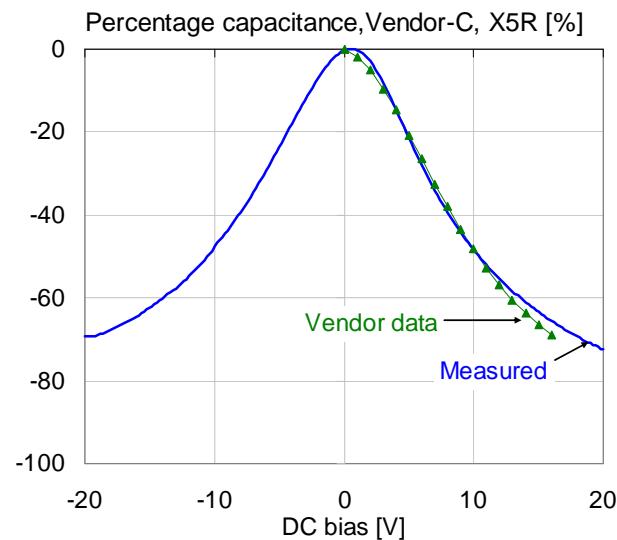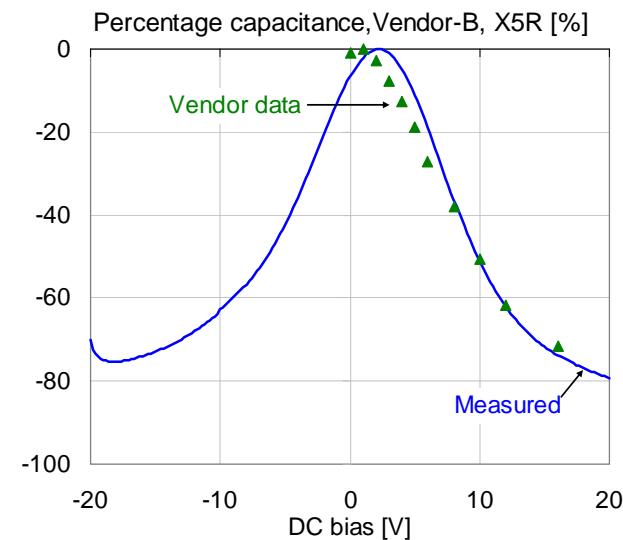
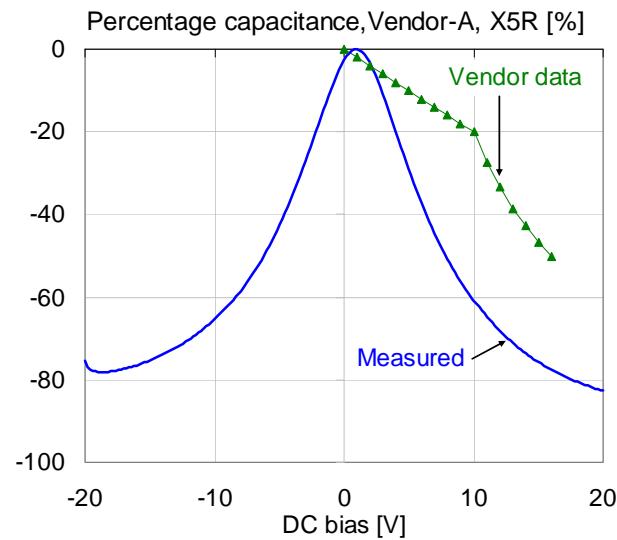


# X7R Correlation at 500mV AC

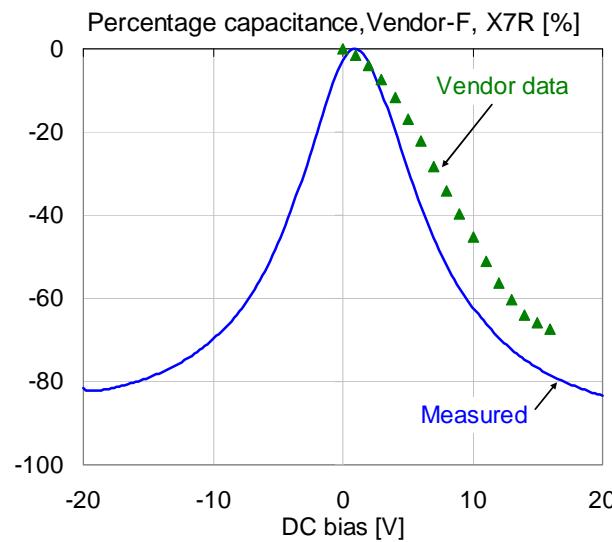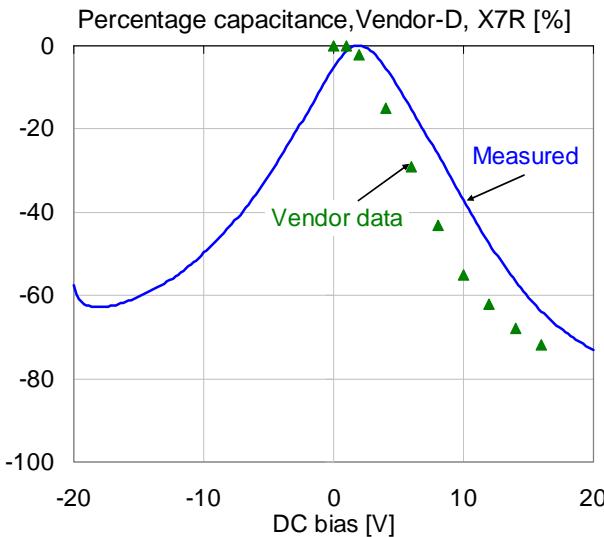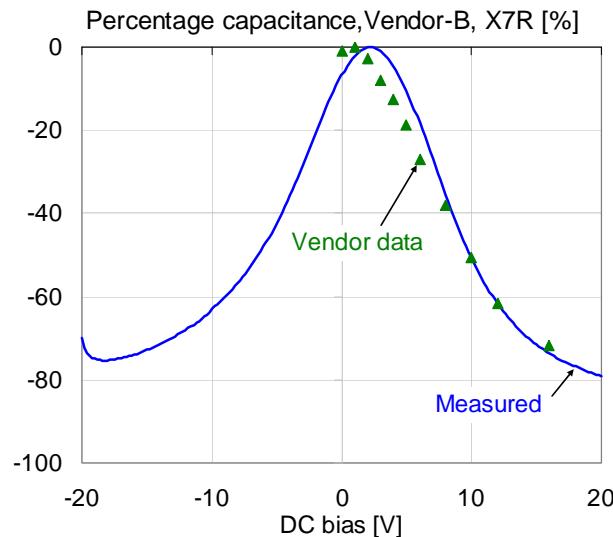


# ESR and ESL vs. Bias

- ESR does not change above SRF
- ESR increases below SRF as C drops
- Piezo effect shows up with increasing bias
- ESL shows no measurable difference

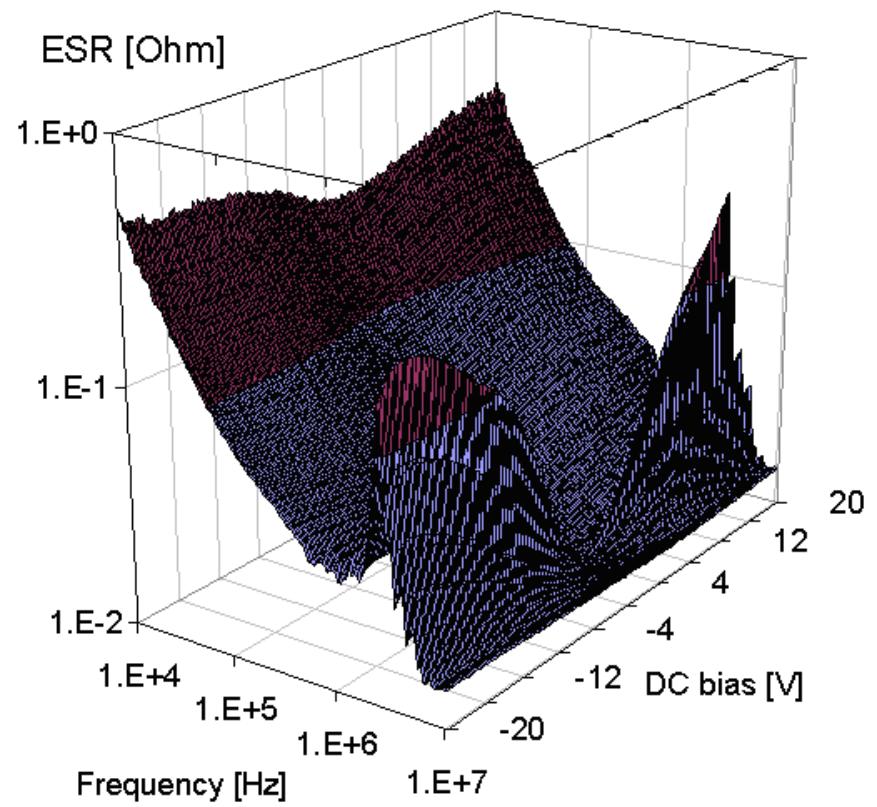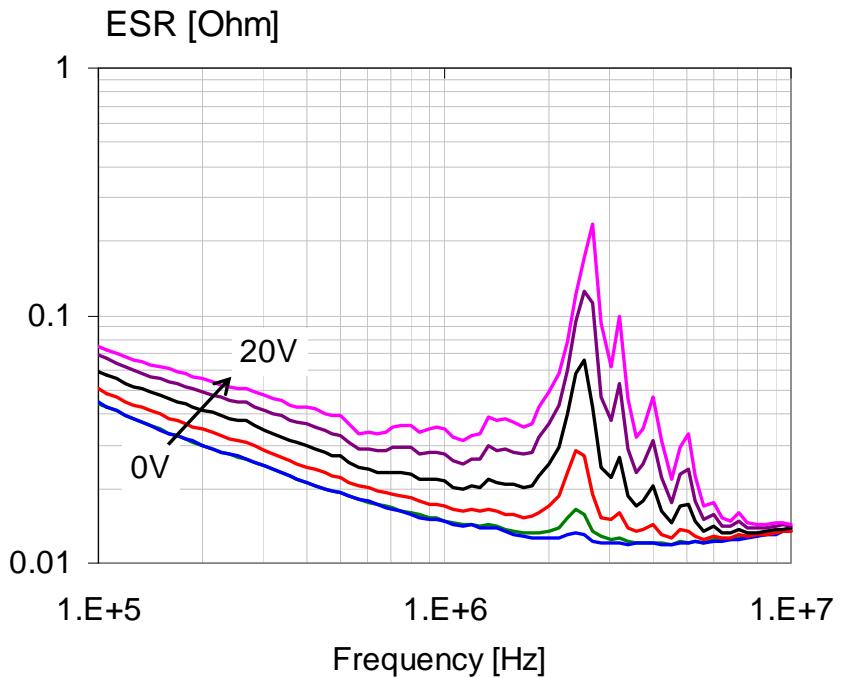

# Beware of Details

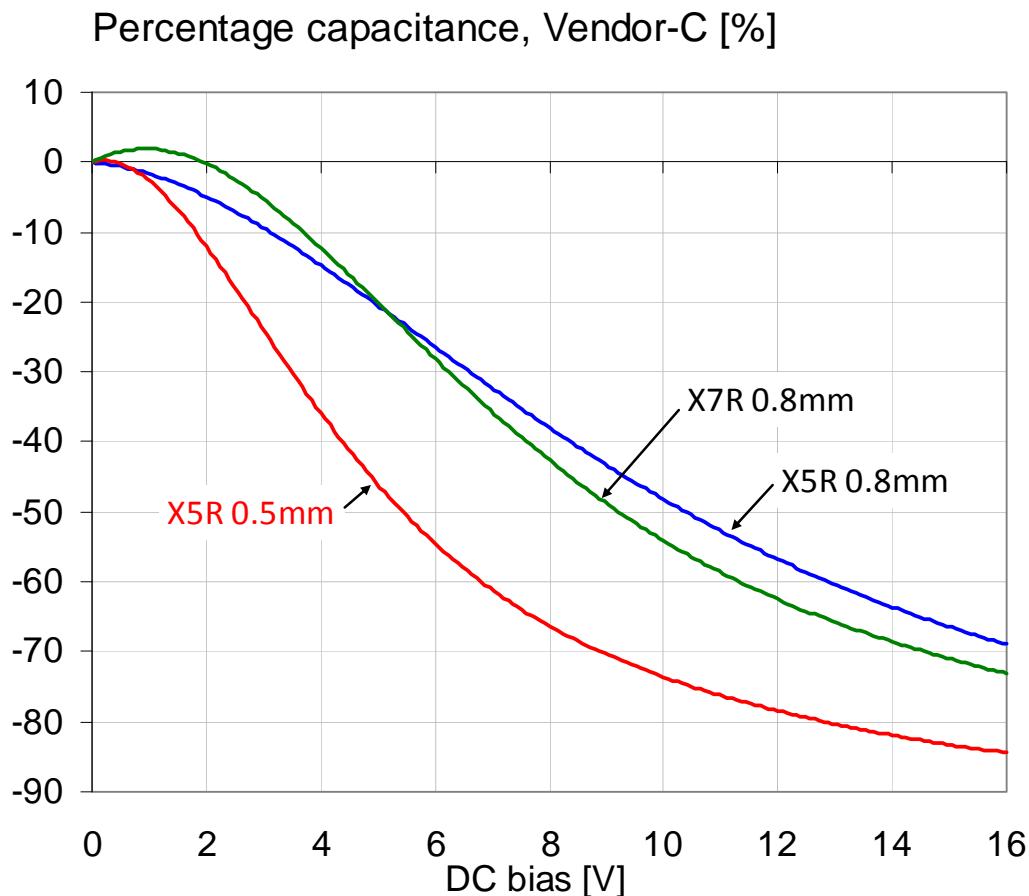


Sensitivity vs. body height



Data from vendor

Lower body height comes with higher sensitivity

# AC bias dependence

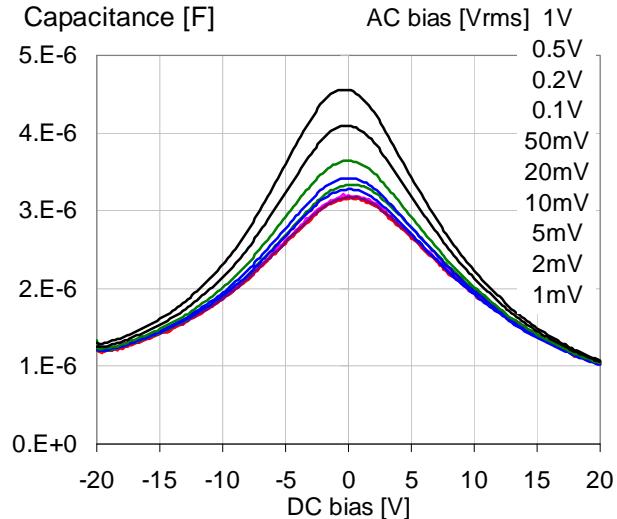

4.7uF 0805-size  
16V X5R parts  
from Vendor F

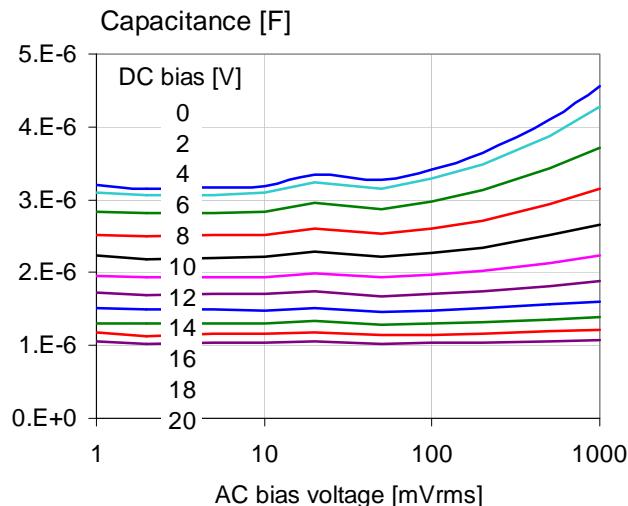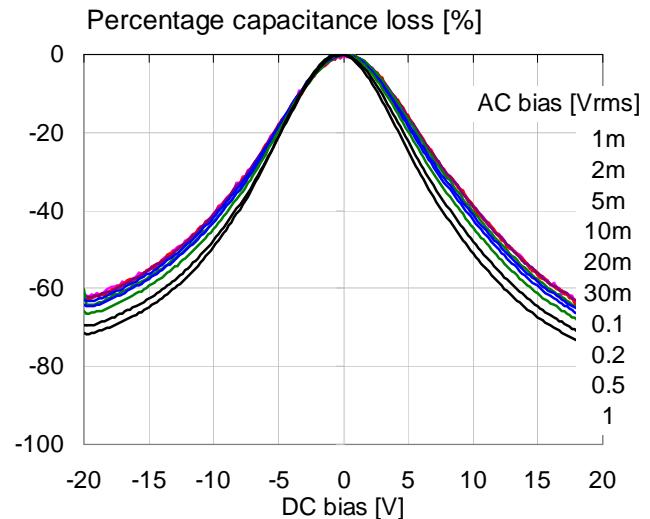


High AC bias increases  
capacitance at low DC bias.

High AC bias lowers  
capacitance at high DC bias.


# Relaxation of Part 1

Part 1: Vendor-A, 47uF 1206-size 6.3V X5R part.  
100Hz, 10mVrms AC bias.

Absolute capacitance change.

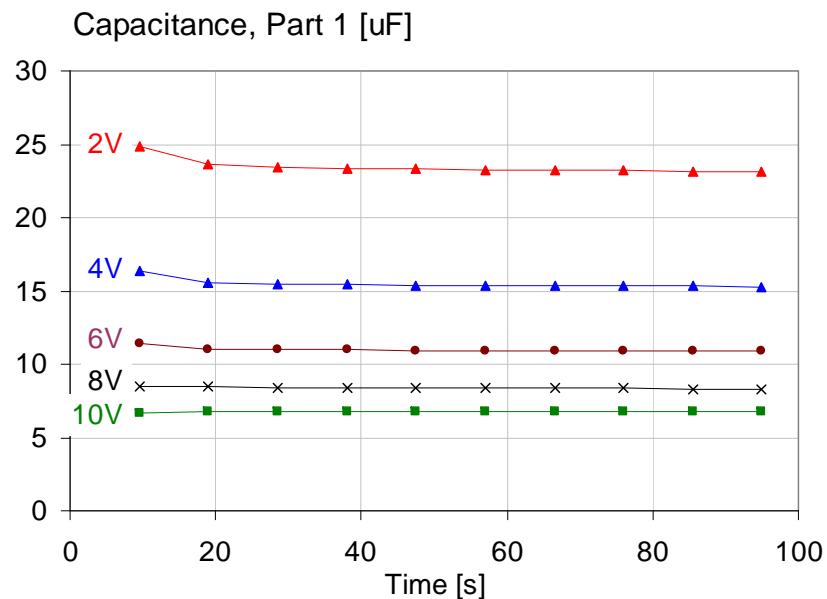


Relative capacitance change.

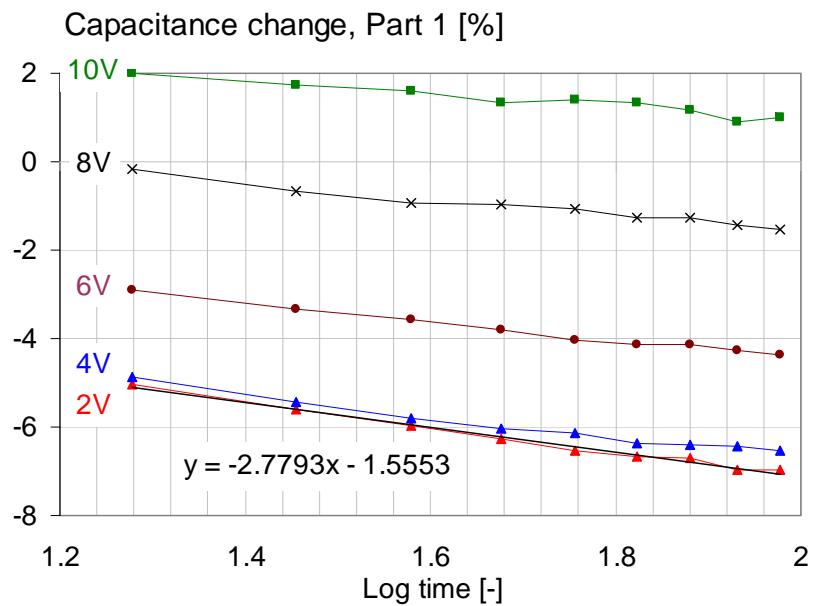


# Relaxation of Part 2

Part 2: Vendor-D, 4.7uF 0805-size 16V X7R part.  
100Hz, 10mVrms AC bias.

Absolute capacitance change.

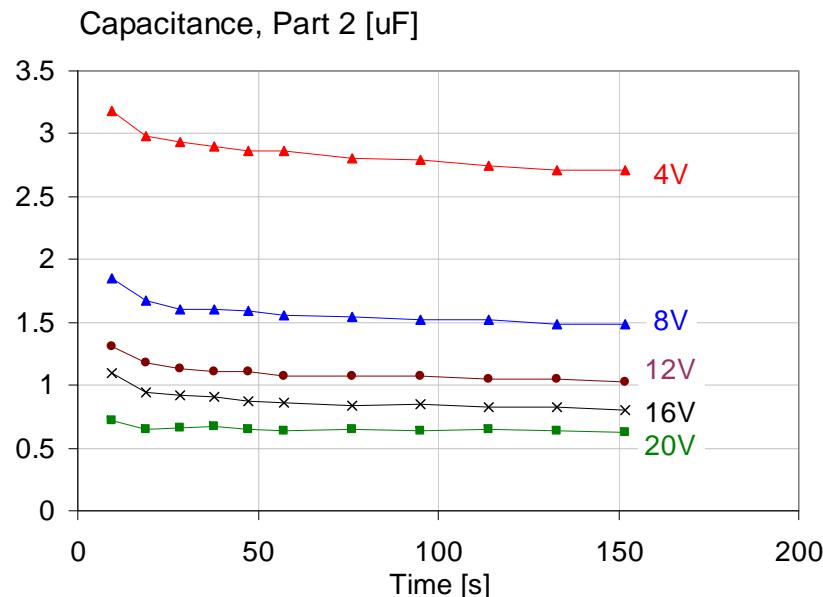


Relative capacitance change.

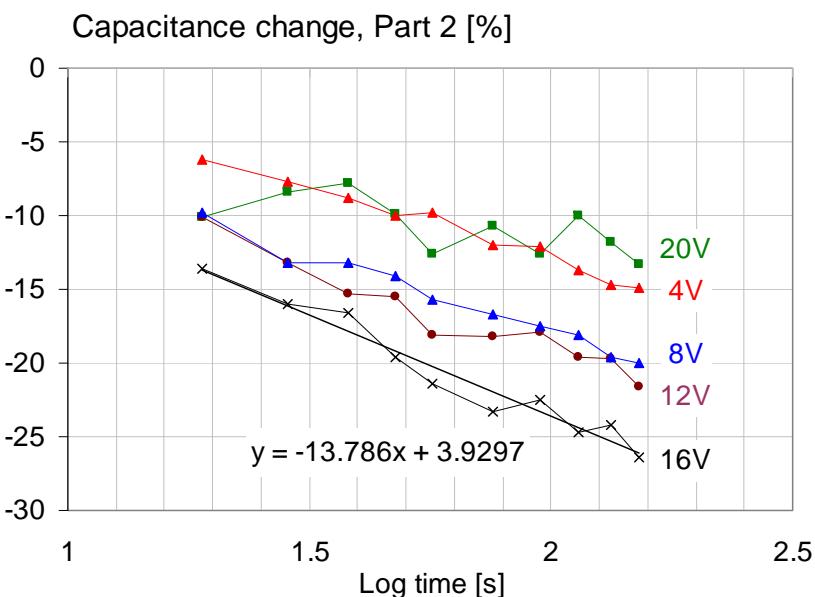


# Quick Relaxation Part

Readings 10 sec  
after changing bias

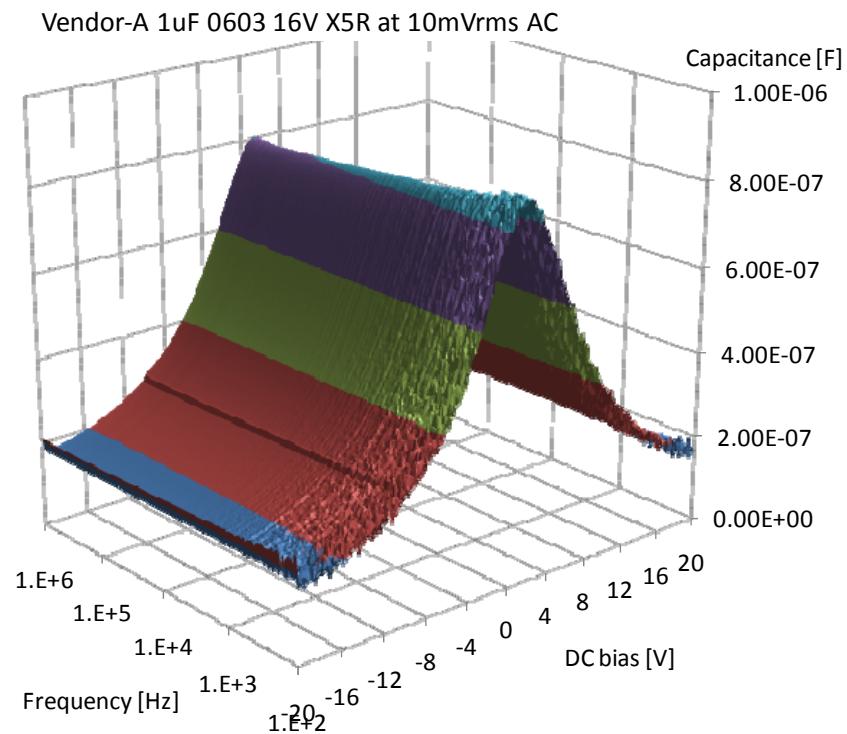


Readings 100 sec  
after changing bias

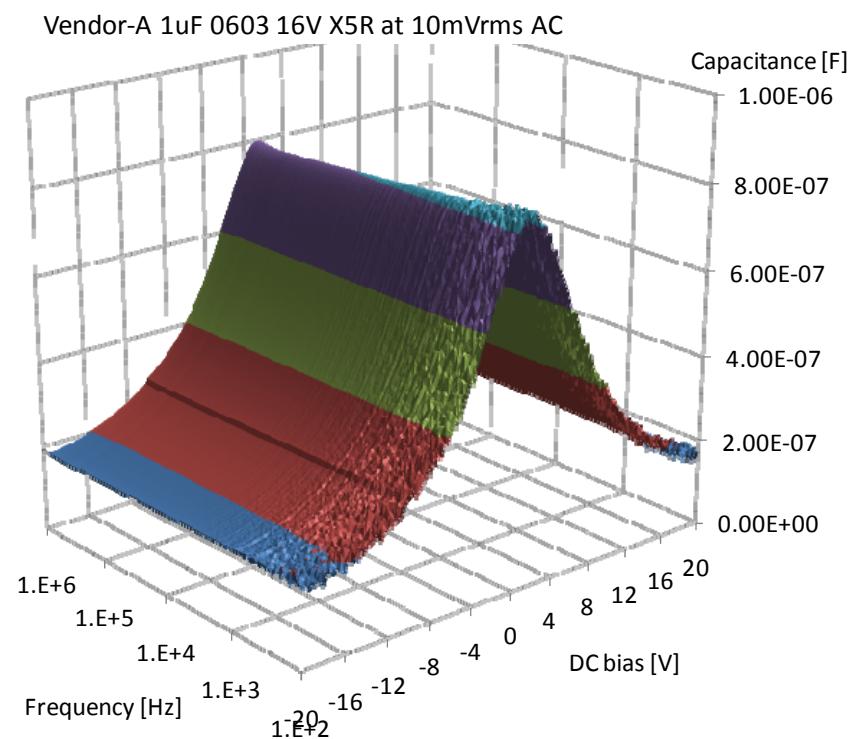


# Slow Relaxation Part

Readings 10 sec  
after changing bias

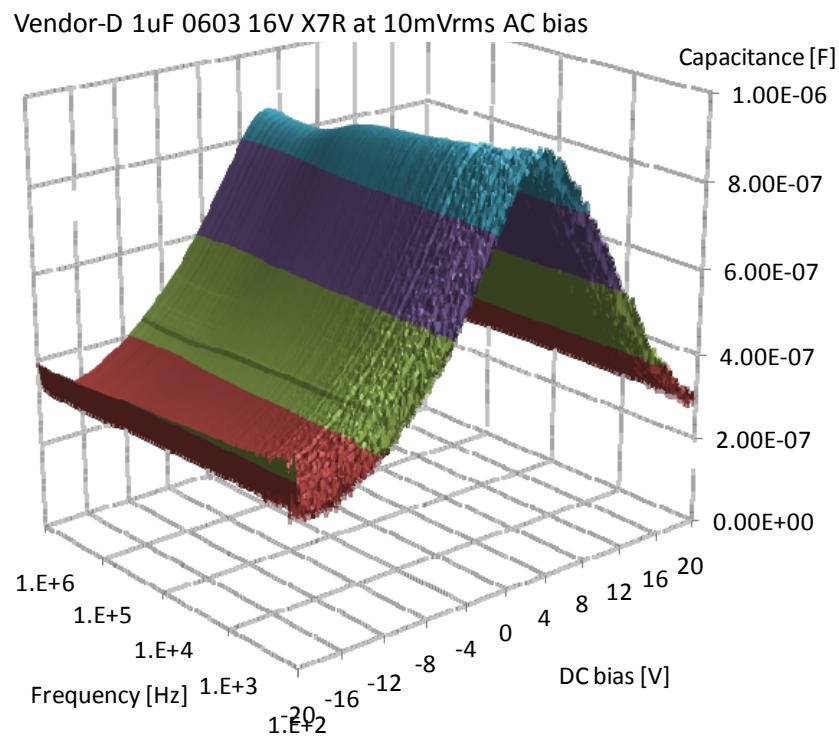



Readings 100 sec  
after changing bias

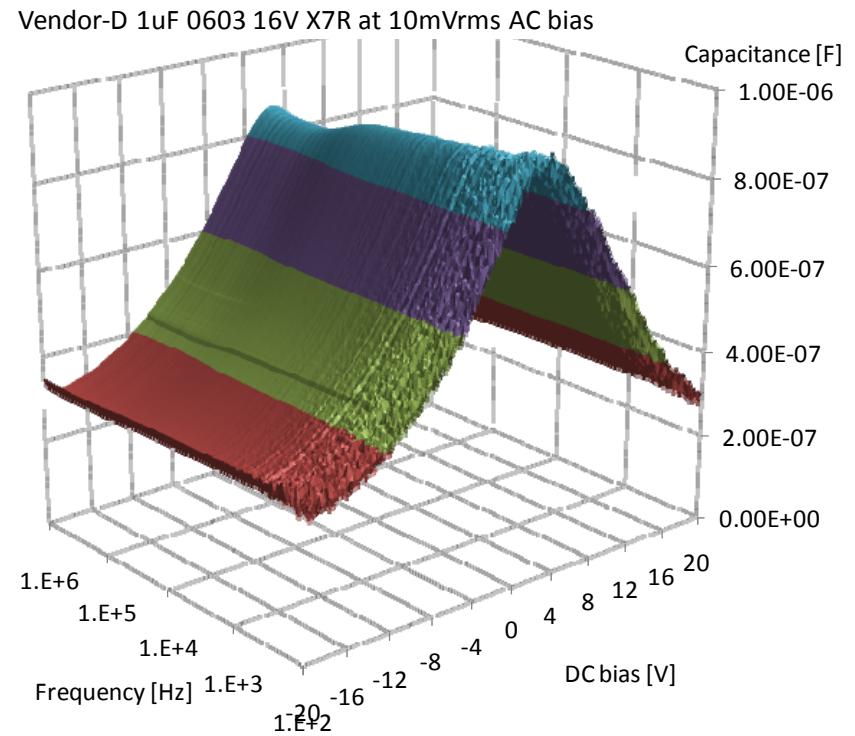

# Temperature Dependence (1)

Capacitance of Vendor B 1uF 0603 16V X5R part



Capacitance shown at 100Hz, measured with 10mVrms AC and zero DC bias

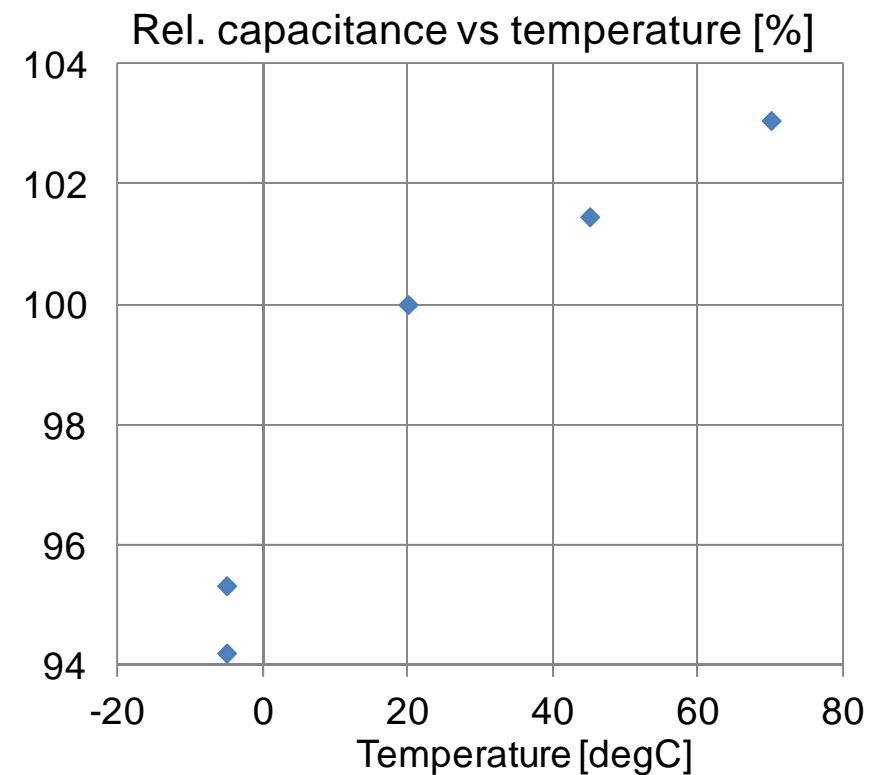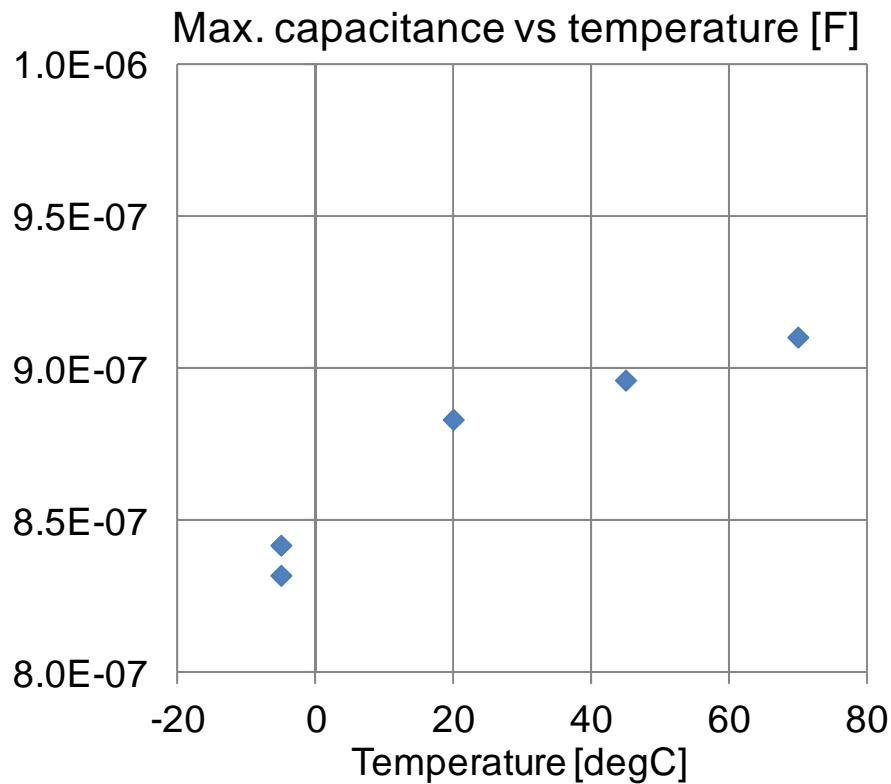

# Temperature Dependence (2)

Capacitance of Vendor B 1uF 0603 16V X5R part


Capacitance shown at 100Hz, measured with 10mVrms AC as a function of DC bias

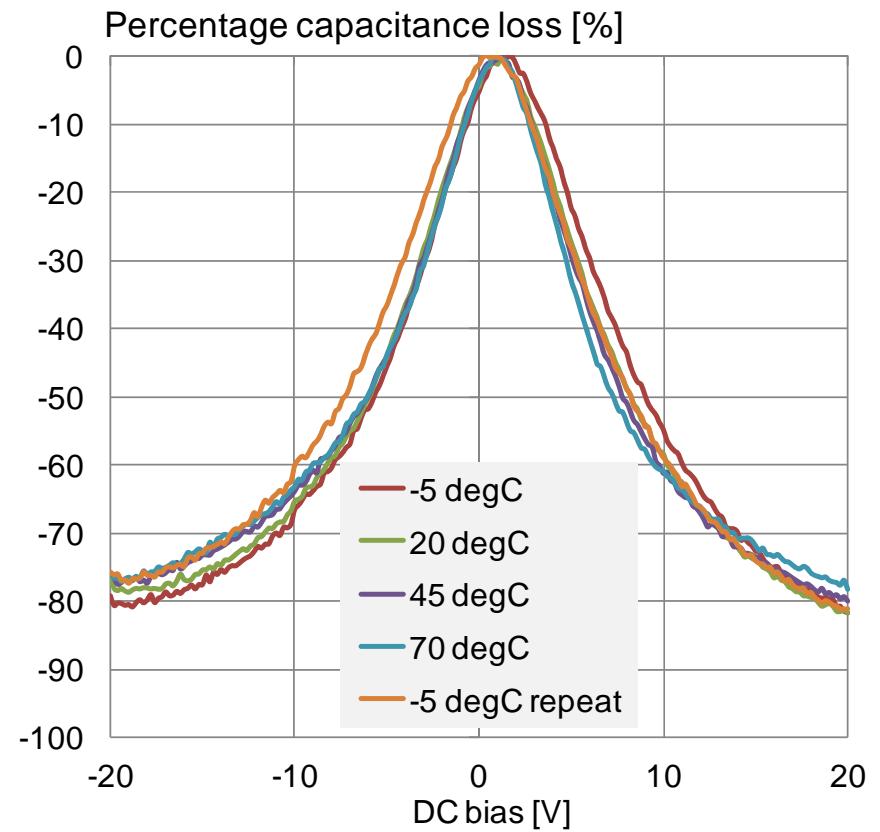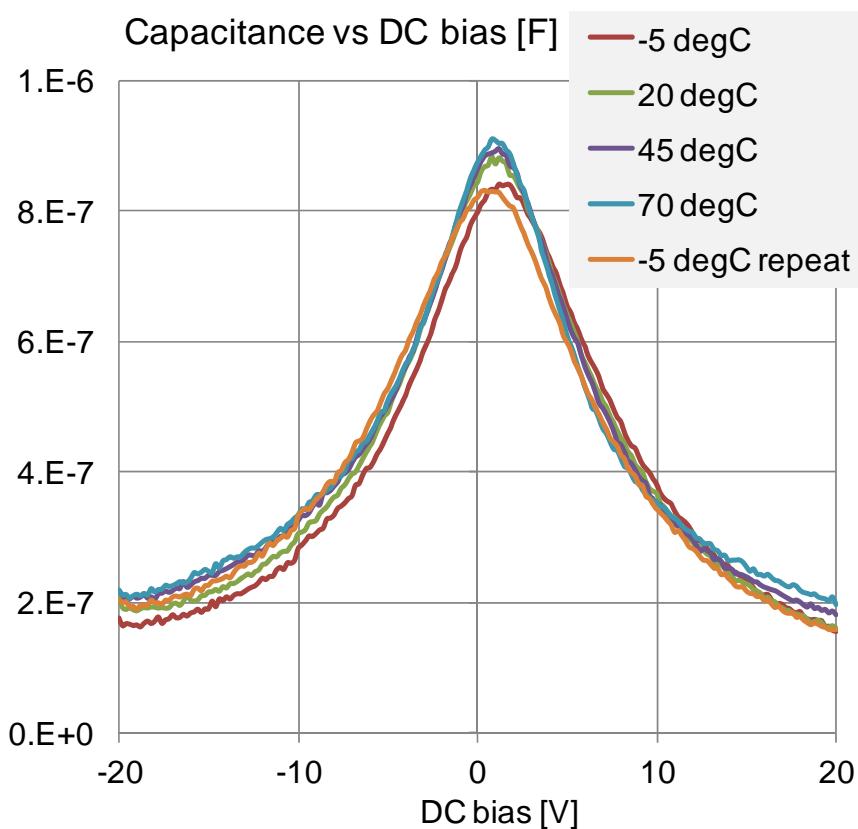

# Temperature Dependence (3)



Capacitance from Vendor B, 1uF 0603 16V X5R part

Capacitance shown at 100Hz, measured with 10mVrms AC as a function of DC bias

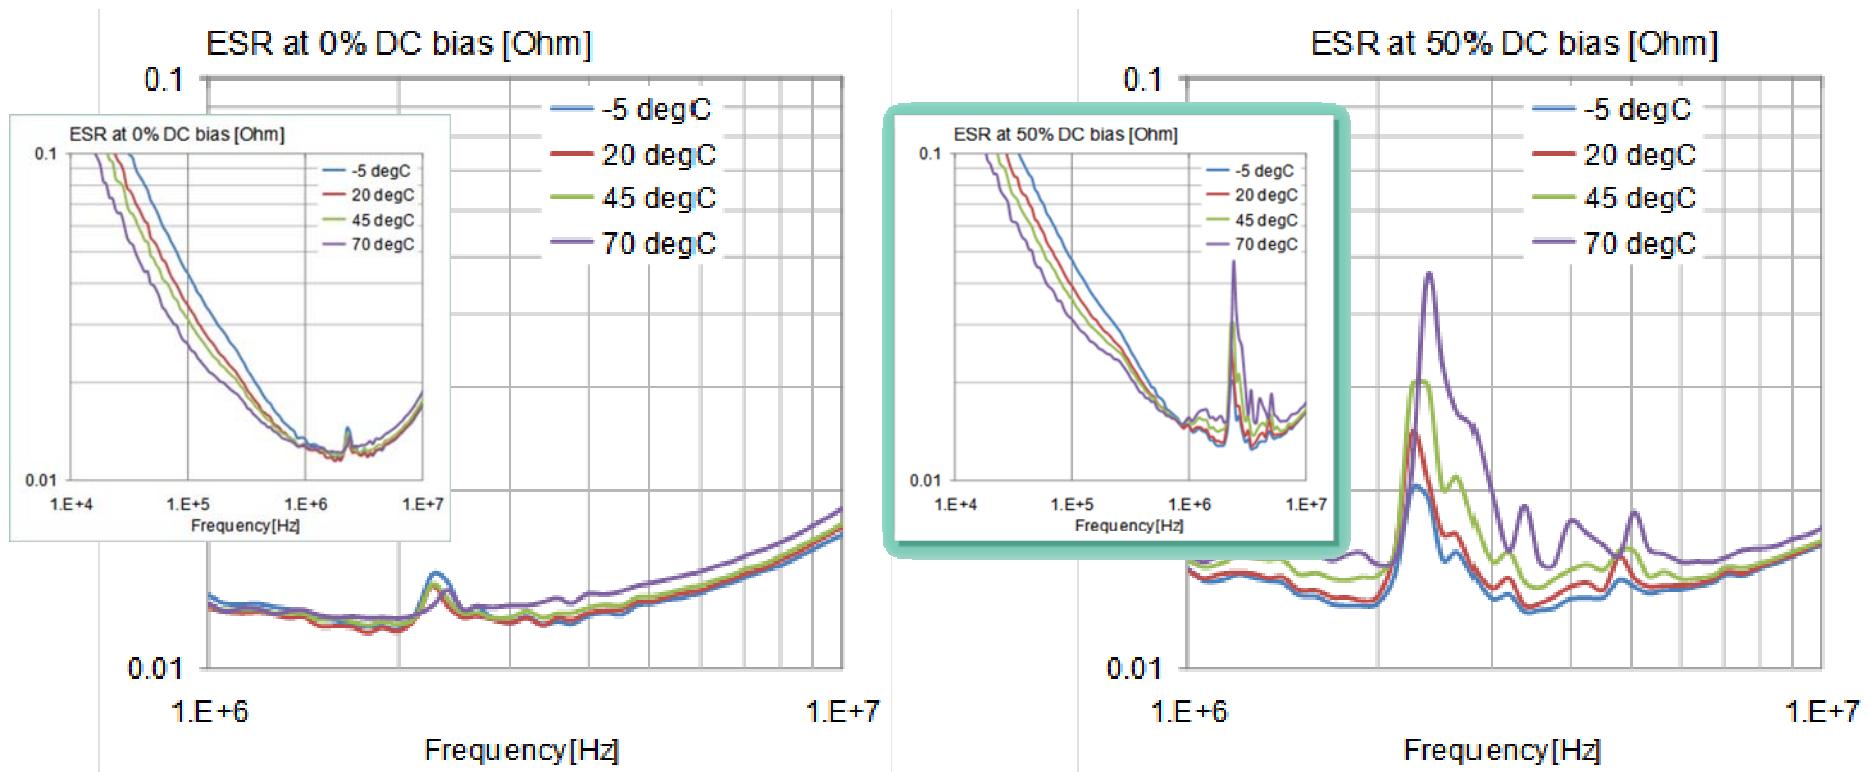

# Paralleled Capacitors

1uF 0603-size 16V X7R part from Vendor-D and  
47uF 1206-size 6.3V X5R part from Vendor-E

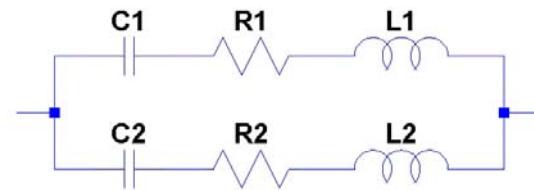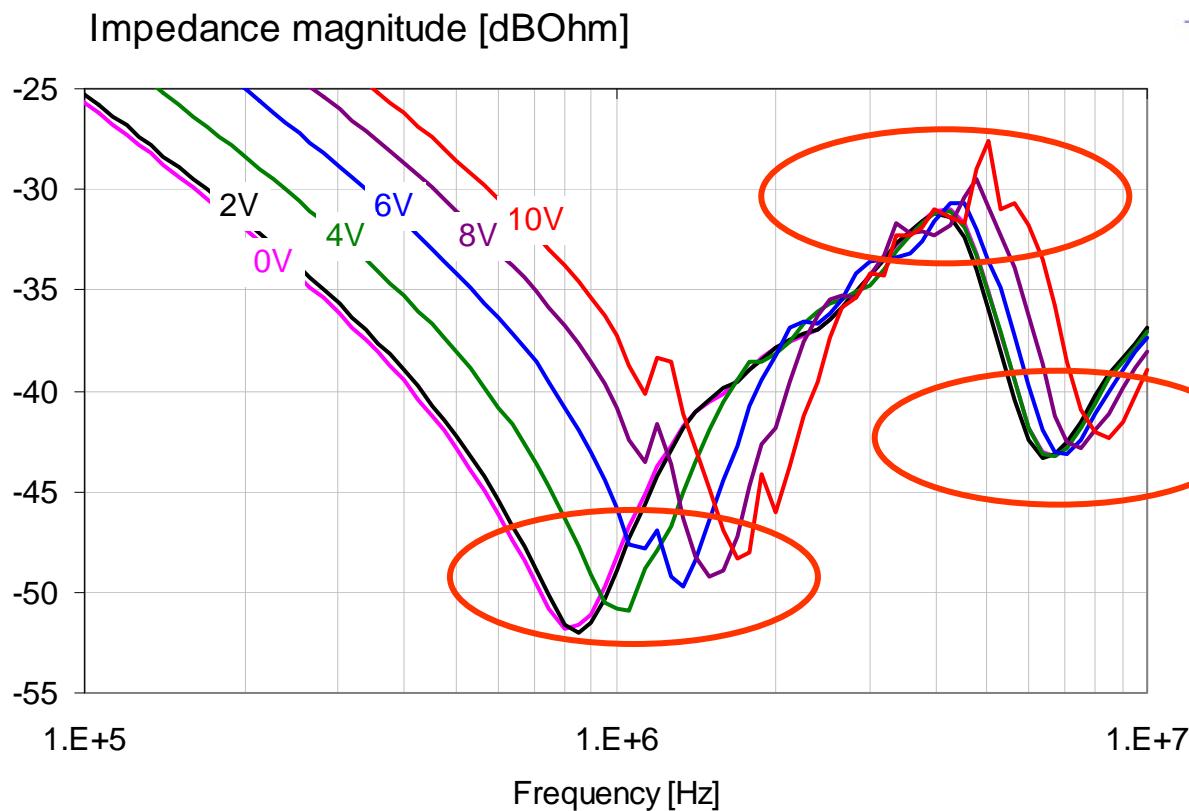


All three resonances shift.


# Capacitors in Filters, Test Setup

C1: 390uF 16V OSCON, DUT: 47uF 6.3V X5R 1206-size MLCC from Vendor-E, L1: 2A ferrite bead

No DC current through L1

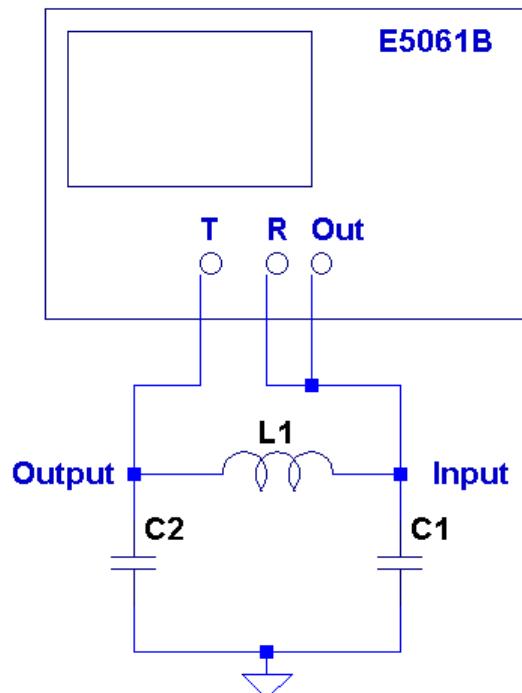

With DC current through L1

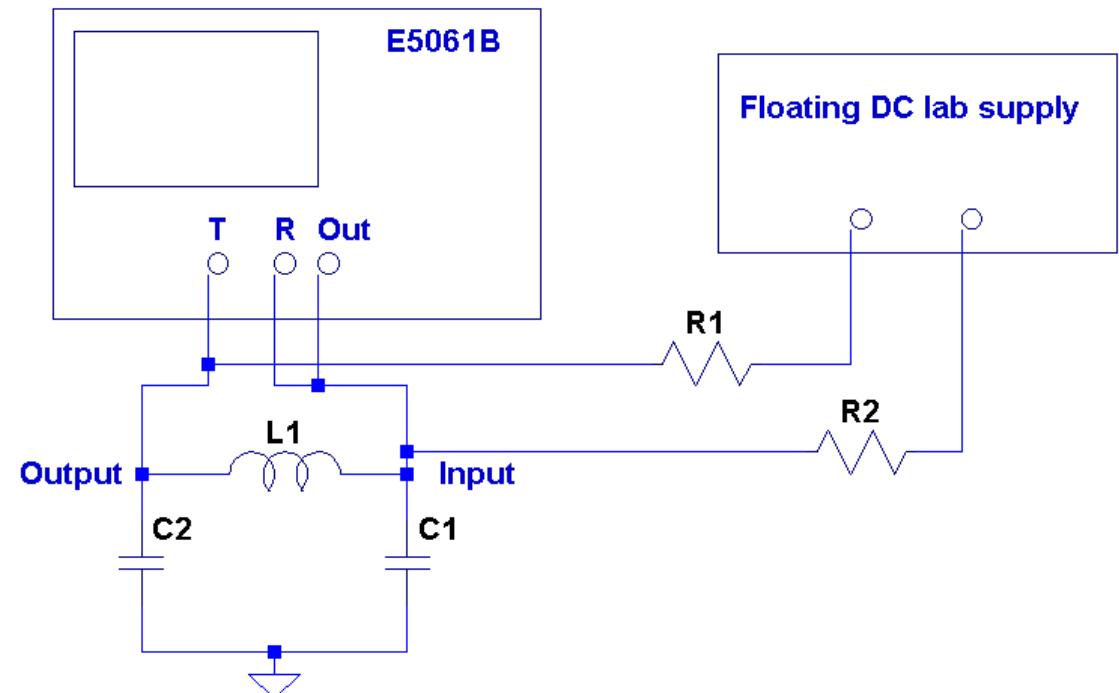



# Filter Response vs. DC Bias Voltage

No DC current bias through L1


No change below 10 kHz and above 1 MHz

No change in peaking

Peak frequency and cut-off frequency increases with increasing bias



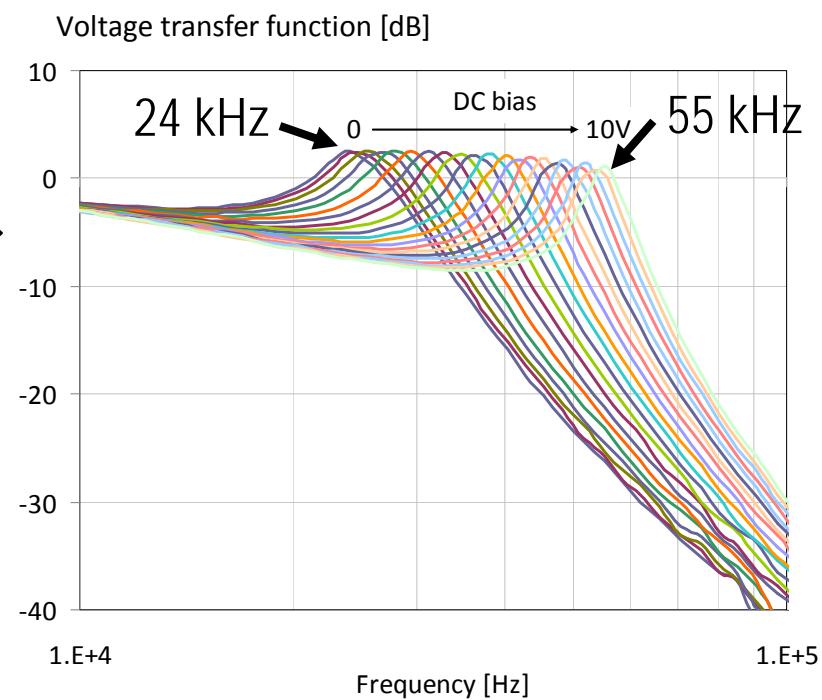
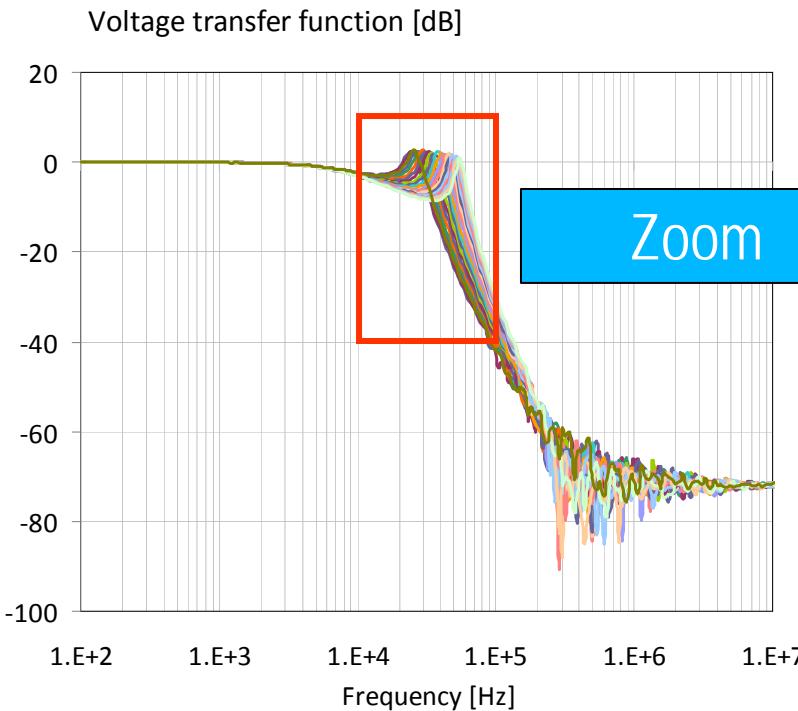


# Filter Response vs. DC Bias Voltage and Current

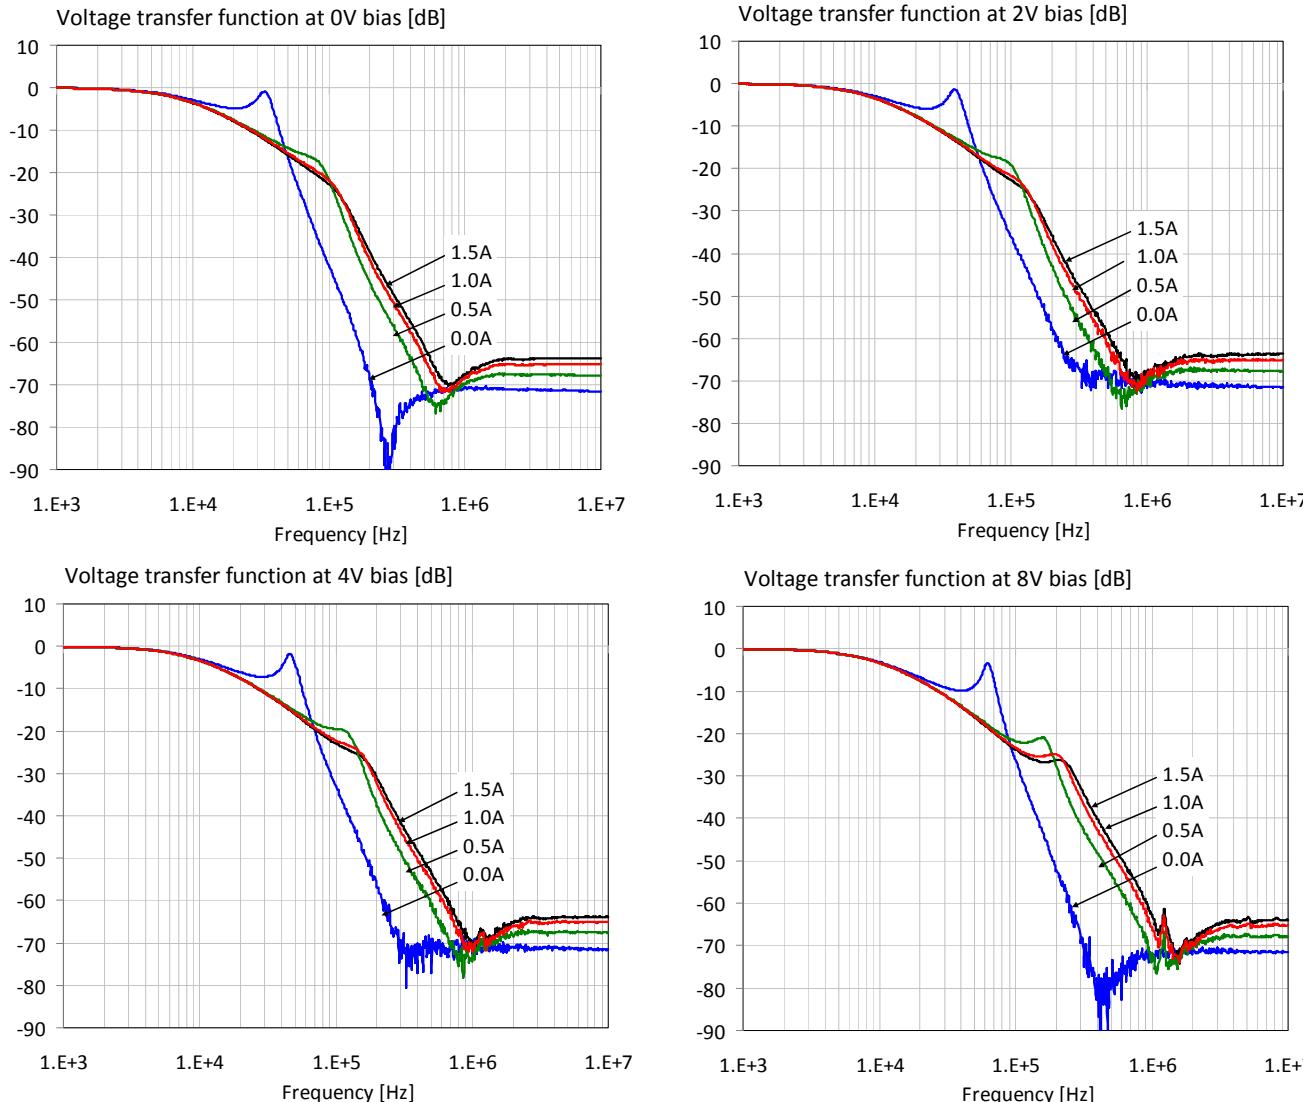

Parameter: DC  
current through  
L1



# Filter Response vs. DC Bias Voltage and Current

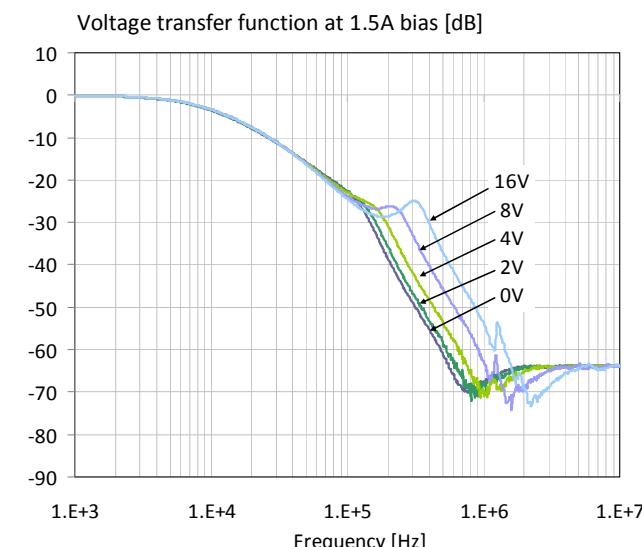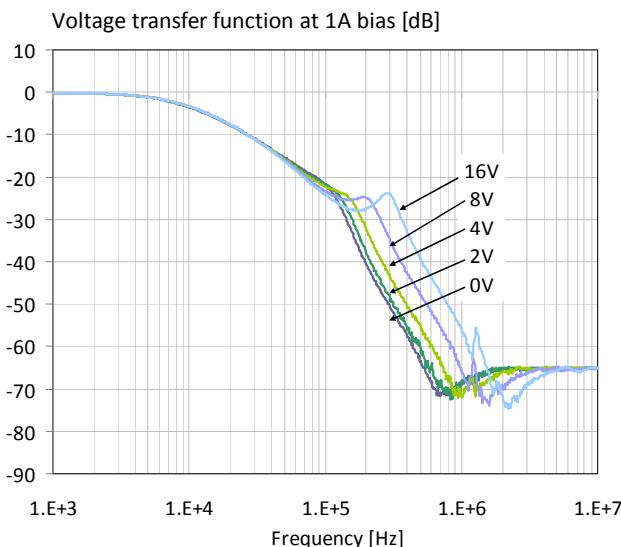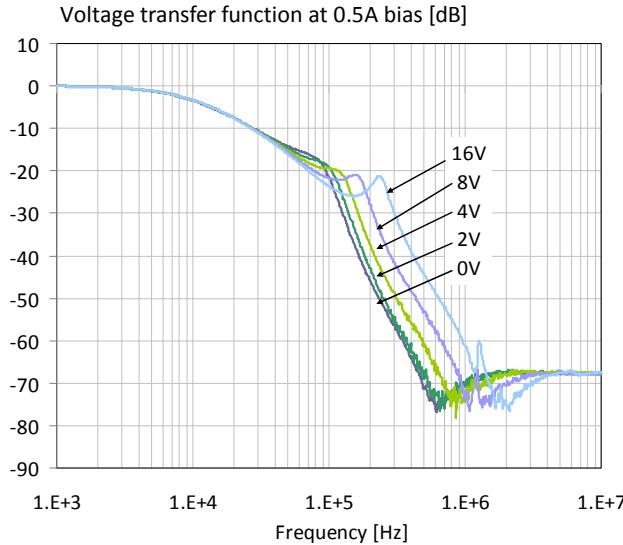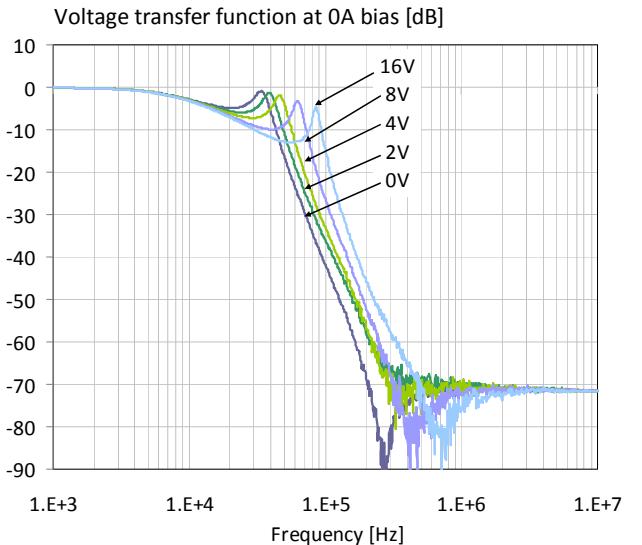

Parameter: DC voltage across C2

# Overall Change in Filter Response

Current bias through L1 eliminates peaking

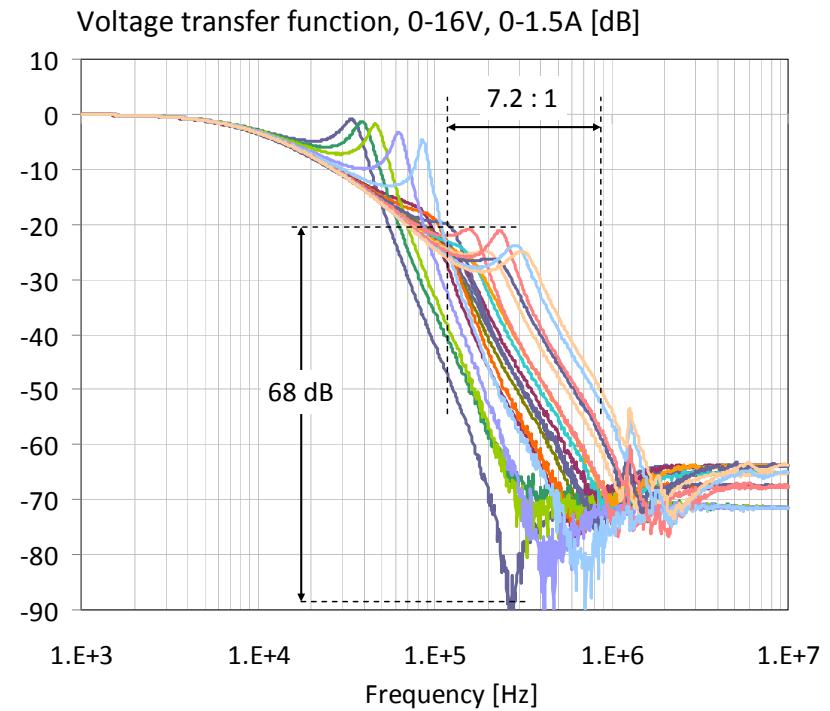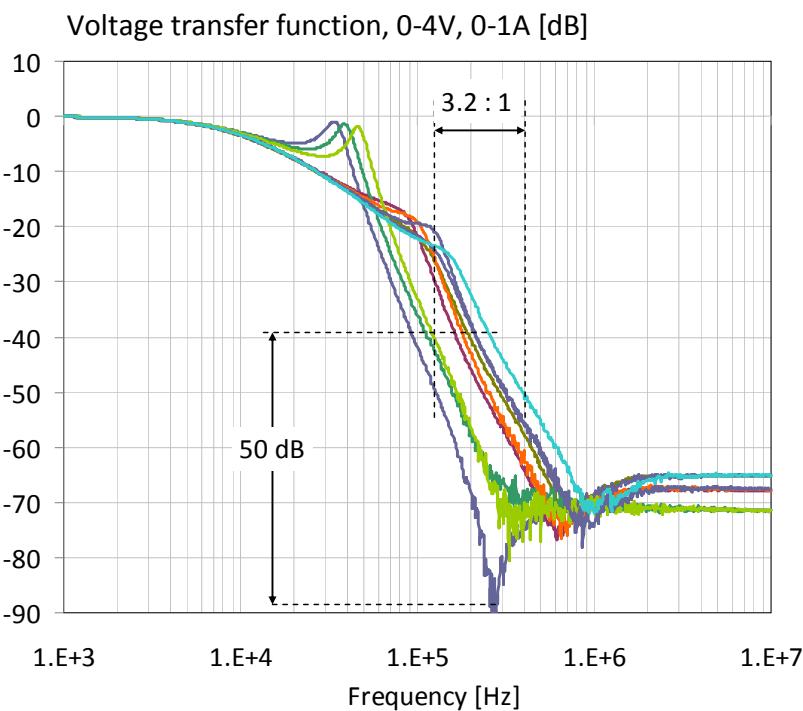

# Conclusions

High volumetric density creates big capacitance drop in some Class II MLCCs with DC bias

X7R parts are not necessarily less sensitive to DC bias than X5R parts

Slow relaxation may result in an additional 20-30% capacitance drop over time (not on the spec sheet!)

Major vendors provide models for DC and AC bias sensitivity

DC and AC bias sensitivity does NOT depend strongly on temperature

DC and AC bias sensitivity is very different across vendors

>> DC and AC bias sensitivity must be taken into account in alternate source selection



**ORACLE®**

**THANK YOU**

Istvan Novak,  
[istvan.novak@oracle.com](mailto:istvan.novak@oracle.com)